Poindus PT60

A slim, all-in-one EPOS terminal with a 15.6" Full HD touchscreen, a spill-proof aluminium body and an optional customer display, all on a compact, space-saving base.

CCR SYSTEMS
AN EXCEL COMPANY

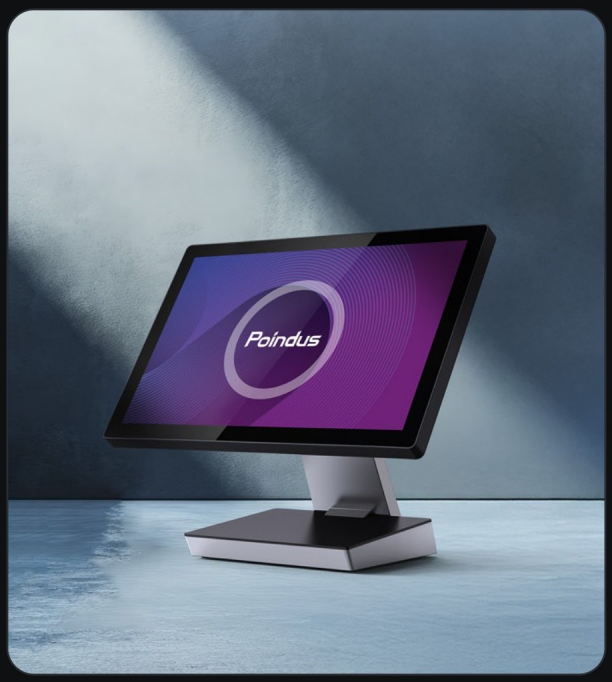

Big screen, small footprint
A 15.6" Full HD touchscreen on a compact base that frees up valuable counter space.

Built for busy counters
IP54 spill-proof front panel, die-cast aluminium body and silent, fanless running.

Two screens, one terminal
Add an integrated 11.6" customer display to show orders, totals and promotions.

Dependable everyday performance
Intel Celeron J6412 processor, 8GB RAM and fast 128GB SSD storage as standard.



The Poindus PT60 packs a full-size 15.6-inch touchscreen into a compact all-in-one terminal, so busy bars, restaurants and shops can keep service moving without cluttering the counter.

PERFECT FOR

- Pubs & bars
- Restaurants & cafés
- Retail & convenience
- Social & members clubs
- Hotels & hospitality

Key Features

Feature	What it means for your venue
15.6" Full HD touchscreen	Clear, responsive screen helps staff find items fast and avoid mistakes.
Compact footprint	Takes up less room on the bar or counter, leaving space for everything else.
IP54 spill-proof front	Shrugs off splashes from drinks and food, so a spill doesn't stop service.
Fanless design	Runs silently with no fan to clog with dust or grease, and fewer parts to wear out.
Tilt hinged stand	Angle the screen to suit your staff and cut glare under bright lighting.
Optional customer display	Show orders, totals, QR codes and promotions to customers at the till.
Built-in reader options	Add card swipe, RFID, iButton or fingerprint readers for fast, secure staff log-in.
Full set of ports	Plug in receipt printers, cash drawers and scanners via USB, serial, LAN and RJ11.

Full technical specifications overleaf.

This specification sheet has been prepared for guidance only. While every effort has been made to ensure the information is accurate, errors and omissions may occur. CCR Systems accepts no liability for inaccuracies, missing information or changes to product specifications, availability or compatibility. All details should be confirmed before purchase, installation or implementation.

POINDUS PT60

Technical Specifications

System

Processor	Intel® Celeron® J6412 (Elkhart Lake), up to 2.6GHz
Memory	8GB DDR4 (1 x SO-DIMM), up to 16GB
Storage	128GB mSATA SSD
Security	Intel® firmware TPM 2.0
Expansion	1 x mini-PCIe (Wi-Fi/Bluetooth on request)
Operating system	Windows 11 (64-bit)
Certification	CE / FCC

Display, audio & power

Screen	15.6" 16:9, 1920 x 1080 Full HD
Brightness	300 nits, LED backlight
Touch	PCAP multi-touch
Front panel	IP54 spill-proof, ultra-thin bezel
Speakers	2 x 2W
Power	12V DC, 5A (60W adaptor)

Connectivity

USB	2 x USB 3.0, 4 x USB 2.0 (2 on side)
Network	1 x RJ45 Gigabit Ethernet
Serial	2 x RS-232 COM (DB9)
Video out	1 x VGA (DB15)
Cash drawer	1 x RJ11
Audio	1 x mic-in / line-out jack
Power in	1 x DC-in jack

Build & environment

Construction	Die-cast aluminium and plastic, technology black
Cooling	Fanless
Dimensions	380 x 336 x 212mm (W x H x D)
Weight	6.6kg net, 7.2kg gross
Operating	0°C to 40°C, 10% to 90% RH, non-condensing
Storage	-20°C to 60°C, 10% to 90% RH, non-condensing

REAR I/O PANEL



RJ11 | DC 12V | COM1 | VGA | USB 3.0 | USB 2.0 | LAN | MIC | COM2

DIMENSIONS

All measurements in mm

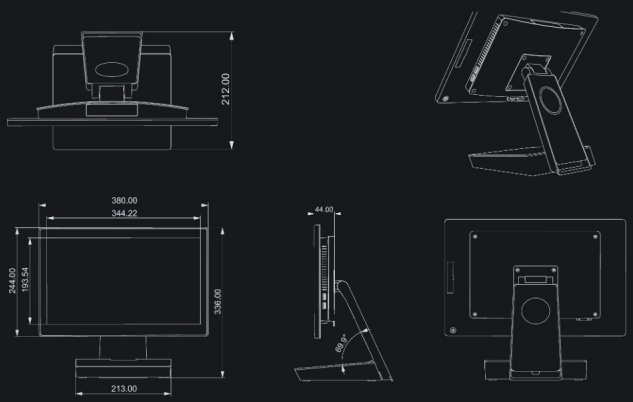

OPTIONS & ACCESSORIES



3-track MSR | MSR + RFID + fingerprint | MSR + RFID + iButton

- 11.6" 1366 x 768 second display, with or without touch
- 2 x 20 VFD customer display (USB)
- iButton reader. On request: PCAP touch second display, RFID or 2D barcode reader

This specification sheet has been prepared for guidance only. While every effort has been made to ensure the information is accurate, errors and omissions may occur. CCR Systems accepts no liability for inaccuracies, missing information or changes to product specifications, availability or compatibility. All details should be confirmed before purchase, installation or implementation.